

## 1. Description


### 1.1. Project

Project Name	OLED1in5-demo
Board Name	OLED1in5-demo
Generated with:	STM32CubeMX 4.22.0
Date	11/22/2017

### 1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103RBTx
MCU Package	LQFP64
MCU Pin number	64

## 2. Pinout Configuration

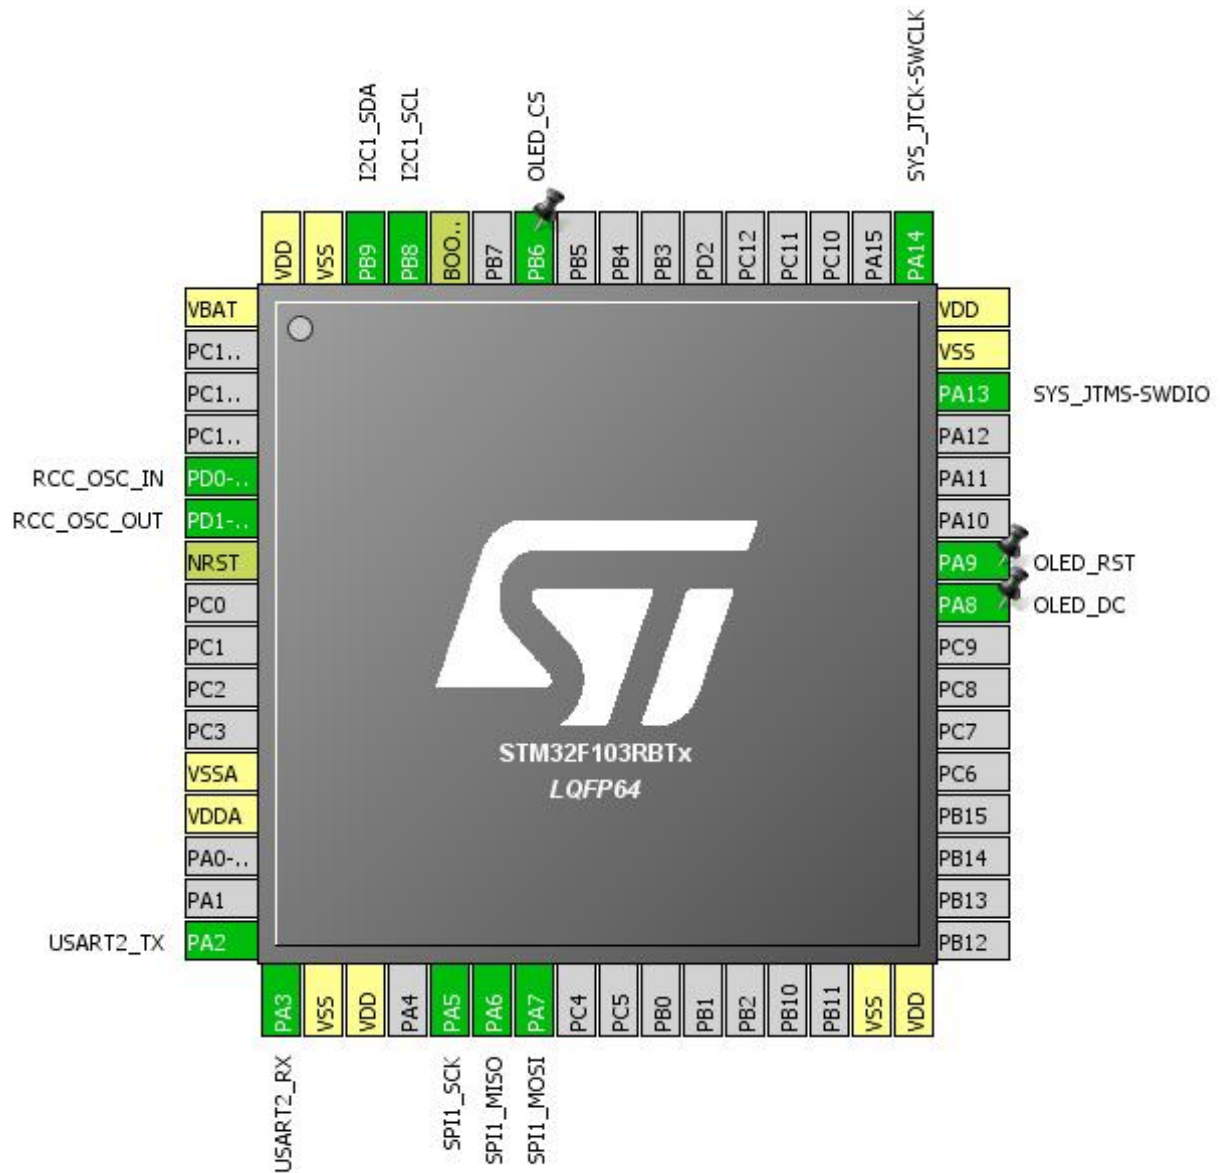

### 3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
16	PA2	I/O	USART2_TX	
17	PA3	I/O	USART2_RX	
18	VSS	Power		
19	VDD	Power		
21	PA5	I/O	SPI1_SCK	SPI1_SCK
22	PA6	I/O	SPI1_MISO	SPI1_MISO
23	PA7	I/O	SPI1_MOSI	SPI1_MOSI
31	VSS	Power		
32	VDD	Power		
41	PA8 *	I/O	GPIO_Output	OLED_DC
42	PA9 *	I/O	GPIO_Output	OLED_RST
46	PA13	I/O	SYS_JTMS-SWDIO	
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	
58	PB6 *	I/O	GPIO_Output	OLED_CS
60	BOOT0	Boot		
61	PB8	I/O	I2C1_SCL	I2C1_SCL
62	PB9	I/O	I2C1_SDA	I2C1_SDA
63	VSS	Power		
64	VDD	Power		

\* The pin is affected with an I/O function



## 5. IPs and Middleware Configuration

### 5.1. I2C1

#### I2C: I2C

##### 5.1.1. Parameter Settings:

###### Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

###### Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

### 5.2. RCC

#### High Speed Clock (HSE): Crystal/Ceramic Resonator

##### 5.2.1. Parameter Settings:

###### System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

###### RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

### 5.3. SPI1

#### Mode: Full-Duplex Master

### 5.3.1. Parameter Settings:

#### Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

#### Clock Parameters:

Prescaler (for Baud Rate)	<b>8 *</b>
Baud Rate	<b>9.0 MBits/s *</b>
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

#### Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

## 5.4. SYS

Debug: Serial Wire

Timebase Source: SysTick

## 5.5. USART2

Mode: Asynchronous

### 5.5.1. Parameter Settings:

#### Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

#### Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

\* User modified value

## 6. System Configuration

### 6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB8	I2C1_SCL	Alternate Function Open Drain	n/a	<b>High *</b>	I2C1_SCL
	PB9	I2C1_SDA	Alternate Function Open Drain	n/a	<b>High *</b>	I2C1_SDA
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	n/a	<b>High *</b>	SPI1_SCK
	PA6	SPI1_MISO	Input mode	No pull-up and no pull-down	<b>n/a</b>	SPI1_MISO
	PA7	SPI1_MOSI	Alternate Function Push Pull	n/a	<b>High *</b>	SPI1_MOSI
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
USART2	PA2	USART2_TX	Alternate Function Push Pull	n/a	<b>High *</b>	
	PA3	USART2_RX	Input mode	No pull-up and no pull-down	<b>n/a</b>	
GPIO	PA8	GPIO_Output	Output Push Pull	n/a	Low	OLED_DC
	PA9	GPIO_Output	Output Push Pull	n/a	Low	OLED_RST
	PB6	GPIO_Output	Output Push Pull	n/a	Low	OLED_CS

### 6.2. DMA configuration

nothing configured in DMA service

### 6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
SPI1 global interrupt	unused		
USART2 global interrupt	unused		

\* User modified value



## ***7. Power Consumption Calculator report***

### 7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103RBTx
Datasheet	13587_Rev17

### 7.2. Parameter Selection

Temperature	25
Vdd	3.3

## 8. Software Project

### 8.1. Project Settings

Name	Value
Project Name	OLED1in5-demo
Project Folder	G:\4.project\10.LCD+OLED\Program\1.5inch OLED Moudle\STM32\XNUCLEO-
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F1 V1.6.0

### 8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No