



### POWER

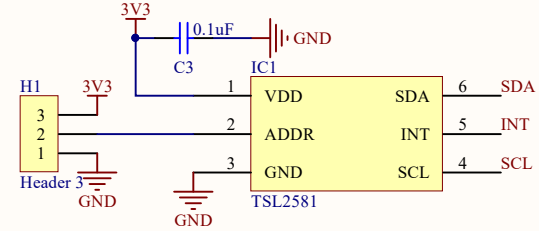

ADDR	I2C address	SMB address
GND	0101001	0001100
Float	0111001	0001100
VCC	1001001	0001100

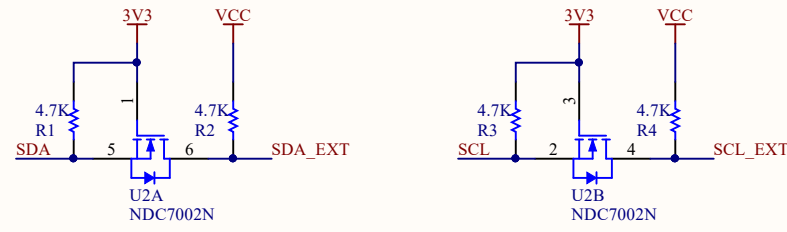