


此电缆为 12PIN-12PIN 直连同面的柔性线 (单位: 毫米)

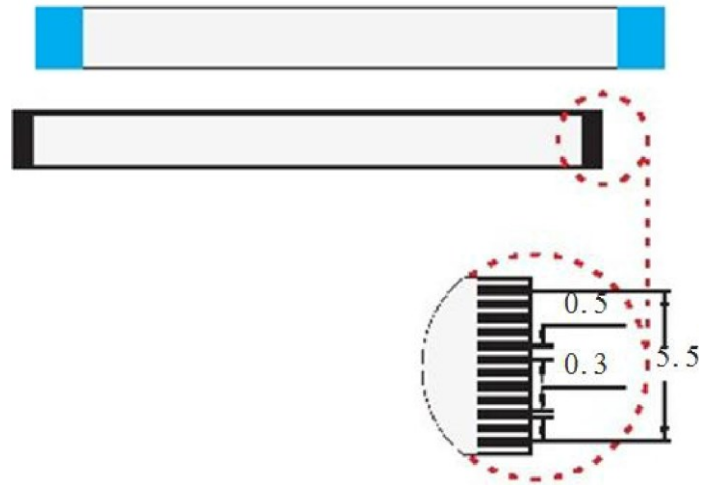

PIN	Input/Output	Define	Description
PIN 1	—	NC	Not connect or connect it to GND
PIN 2	VCC	VCC	Input +3.3V, the VCC input could not less than 3.1V
PIN 3	GND	GND	—
PIN 4	Input	RX	UART receive pin
PIN 5	Output	TX	UART send pin
PIN 6	Input	D-	USB D- pin
PIN 7	Output	D+	USB D+ pin
PIN 8	—	NC	—
PIN 9	Output	BEEPER	Beeper pin, Low when idle
PIN10	Output	DLED	Decode indicator, Low when idle.
PIN11	—	NC	—
PIN12	Input	TRIG	Weak pull-up, Low toggle