


1

2



3

4


A

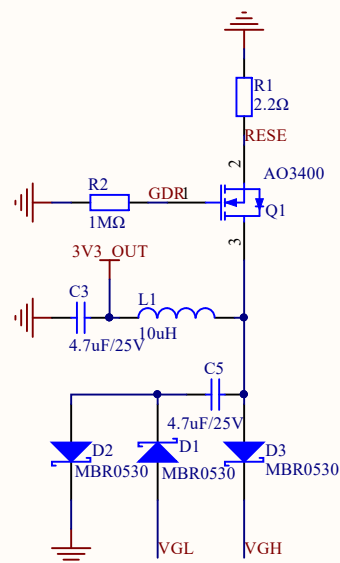

B

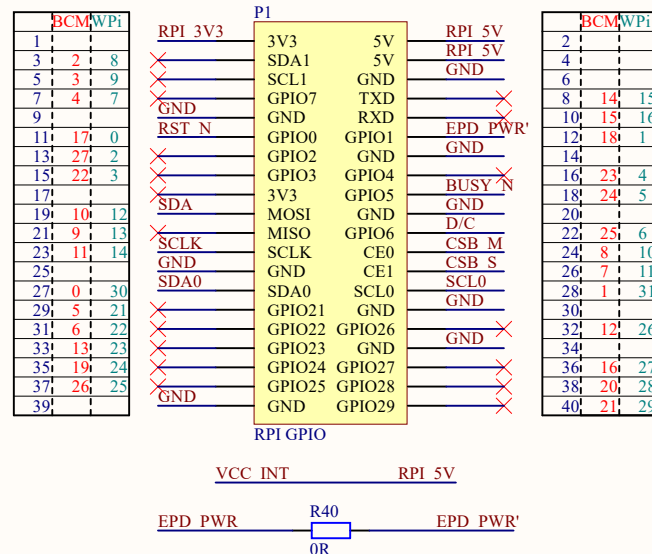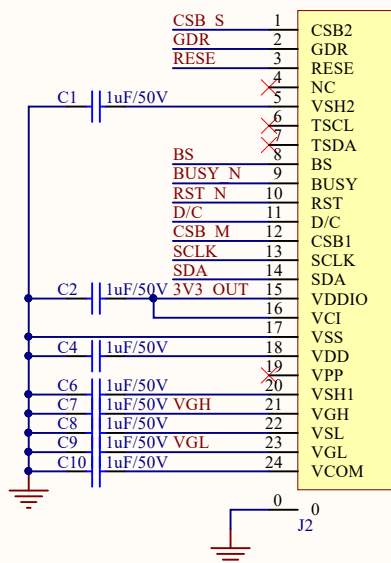

	VCC	GND
BS	3-line SPI	4-line SPI




Waveshare

10.85inch e-Paper HAT+


A

B

C






D

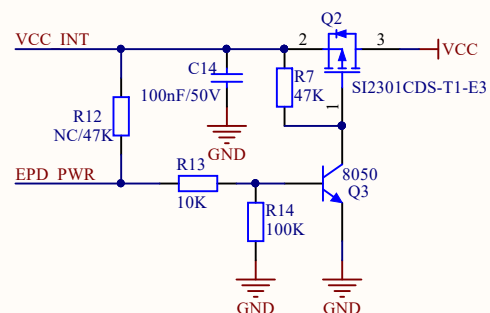

Introduction to R4 resistors :

* NC : Use a separate pin control control, in order to save electricity
* 47K : Always powered on, saving I/O interfaces

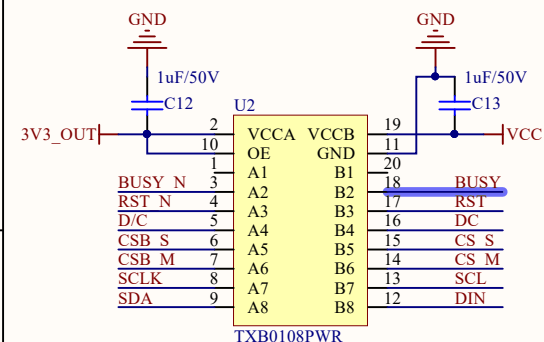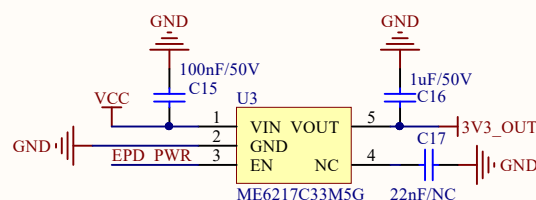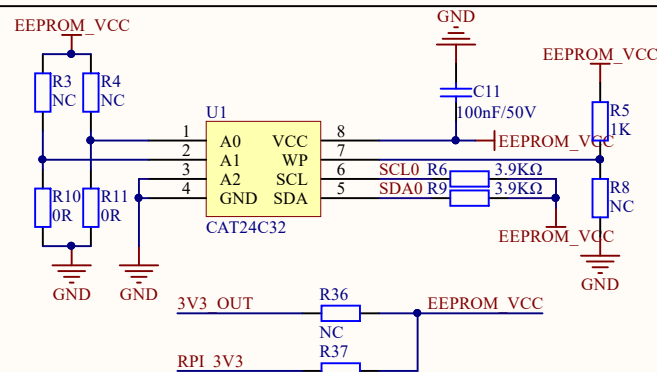

C

D

1

2

3

4



10.85inch e-Paper HAT+

Interface Config


1 0



1	3-line SPI
0	4-line SPI

PWR
BUSY
RST
DC
CS_S
CS_M
SCLK
DIN
GND
VCC

P2

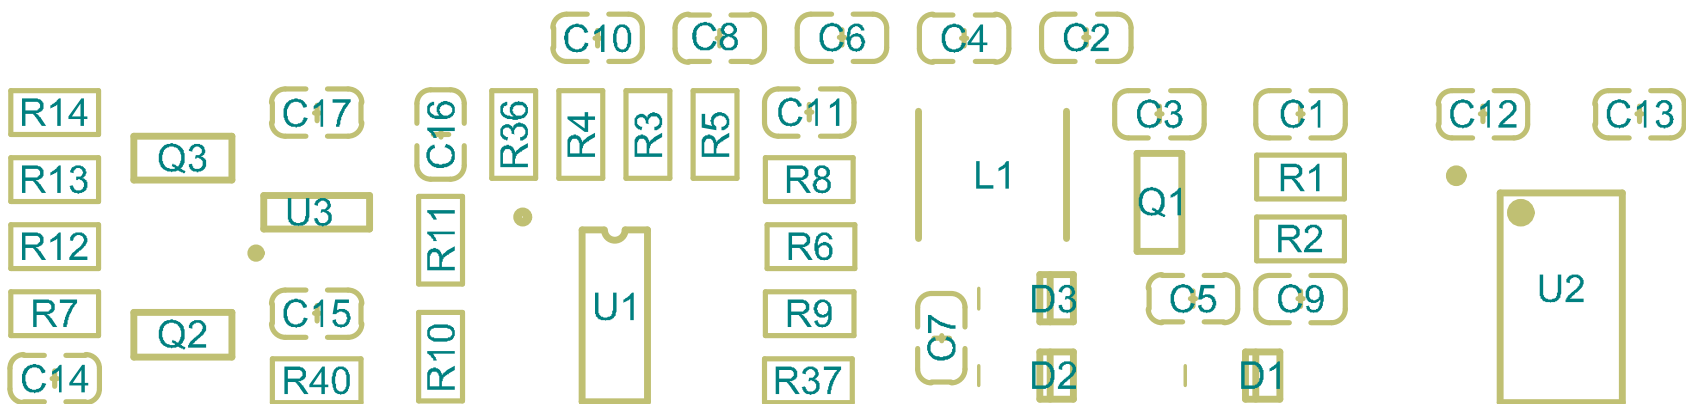

P1