


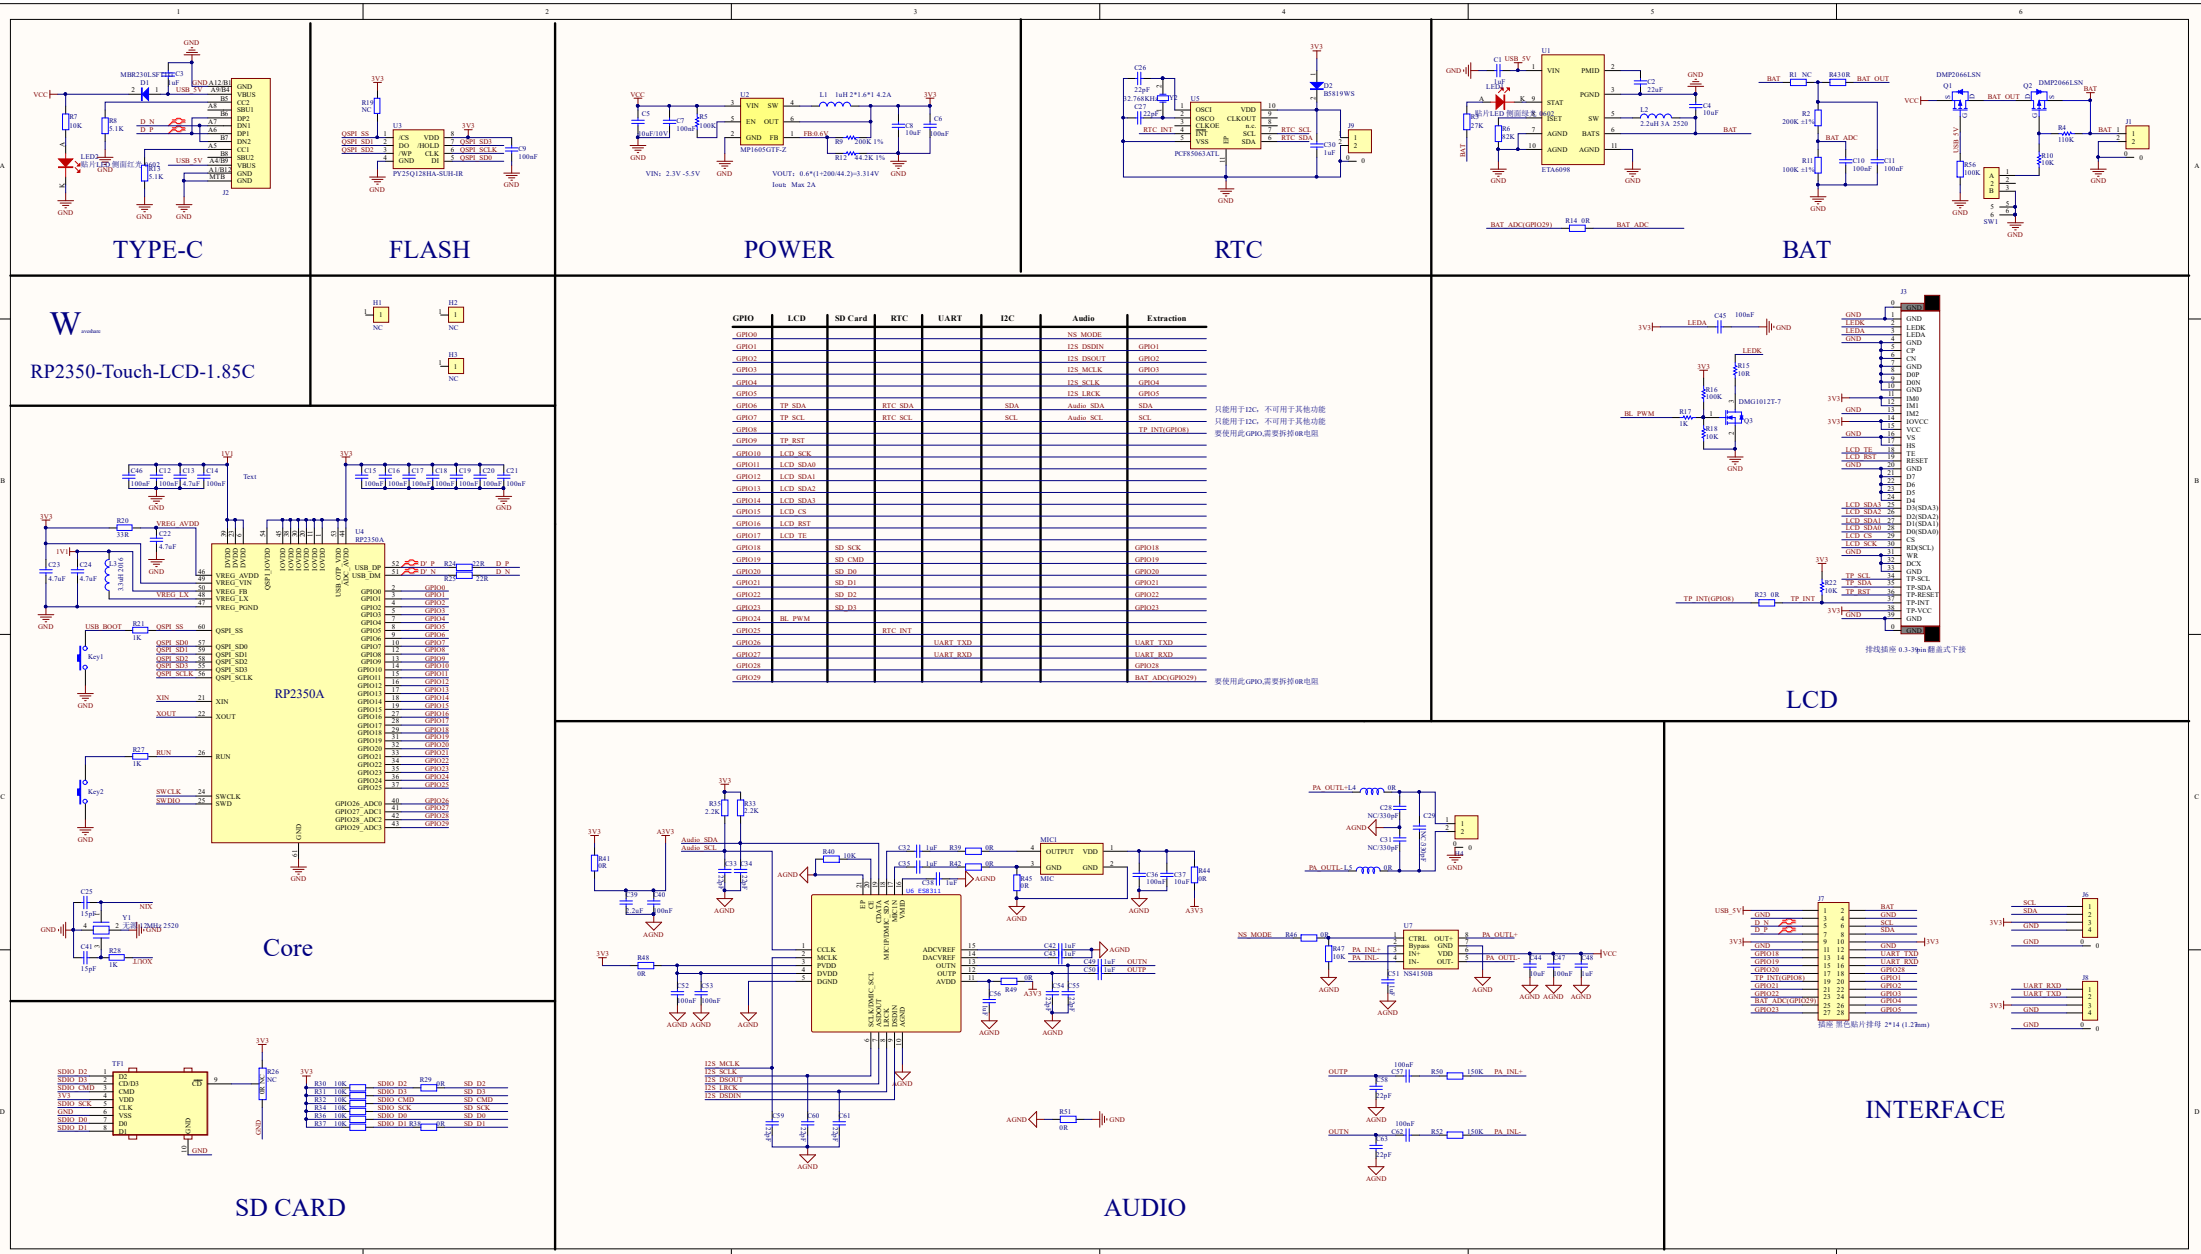

TYPE-C


FLASH

POWER

RTC

BAT

RP2350-Touch-LCD-1.85C



GPIO	LCD	SD Card	RTC	UART	I2C	Audio	Extraction
GPIO0	NS_SCKIN					NS_SCKIN	
GPIO1	I2S_DININ					I2S_DININ	GPIO1
GPIO2	I2S_DINOUT					I2S_DINOUT	GPIO2
GPIO3	I2S_MCLK					I2S_MCLK	GPIO3
GPIO4	I2S_SCKL					I2S_SCKL	GPIO4
GPIO5	I2S_LRCK					I2S_LRCK	GPIO5
GPIO6	TP_SDA		RTC_SDA		SDA	Audio_SDA	SDA
GPIO7	TP_SCL		RTC_SCL		SCL	Audio_SCL	SCL
GPIO8							
GPIO9	TP_RST					TP_INT(GPIO8)	
GPIO10	LCD_SCK						
GPIO11	LCD_SDA0						
GPIO12	LCD_SDA1						
GPIO13	LCD_SDA2						
GPIO14	LCD_SDA3						
GPIO15	LCD_CS						
GPIO16	LCD_RST						
GPIO17	LCD_TE						
GPIO18	SD_SCK						GPIO18
GPIO19	SD_CMD						GPIO19
GPIO20	SD_D0						GPIO20
GPIO21	SD_D1						GPIO21
GPIO22	SD_D2						GPIO22
GPIO23	SD_D3						GPIO23
GPIO24	IR_PWM						GPIO24
GPIO25			RTC_INT				
GPIO26				UART_TXD			UART_TXD
GPIO27				UART_RXD			UART_RXD
GPIO28							GPIO28
GPIO29						BAT_ADC(GPIO29)	

使用此GPIO,需要外接60k电阻

LCD

Core

SD CARD

AUDIO

INTERFACE