


1

2



3

4

A

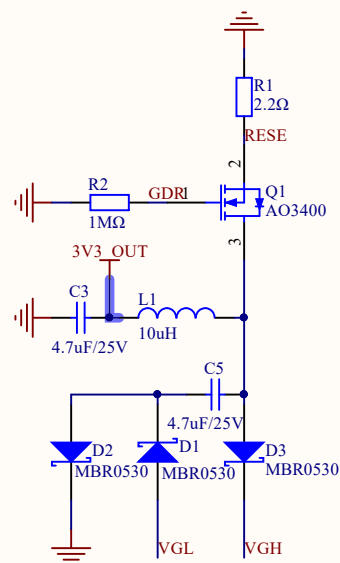


B

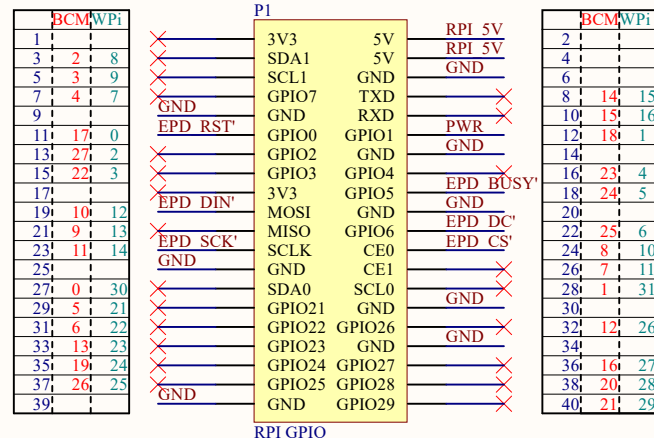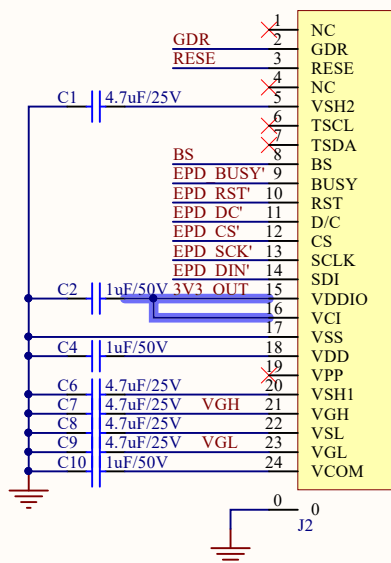

VCC INT RPI 5V


	VCC	GND
BS	3-line SPI	4-line SPI




A

B


C



D

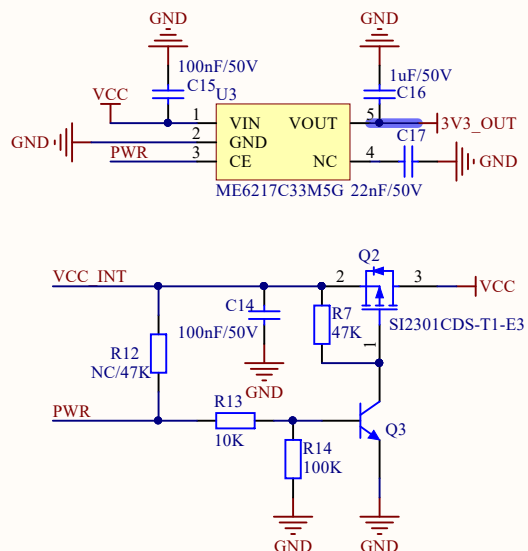

Introduction to R4 resistors :
 * NC : Use a separate pin control, in order to save electricity
 * 47K : Always powered on, saving I/O interfaces

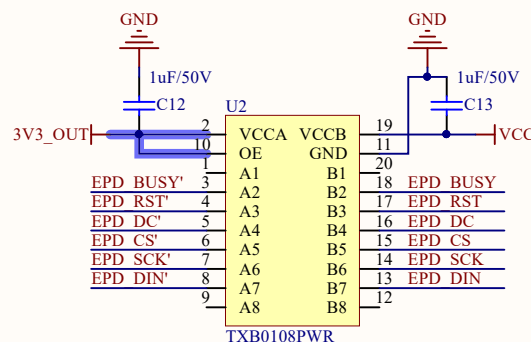

W aveshare

e-Paper Driver HAT (B)

C

D

1

2

3

4



e-Paper Driver HAT (B)

Interface Config

1 0



J2


1

24

PWR
BUSY
RST
DC
CS
SCLK
DIN
GND
VCC

P2

1	3-line SPI
0	4-line SPI

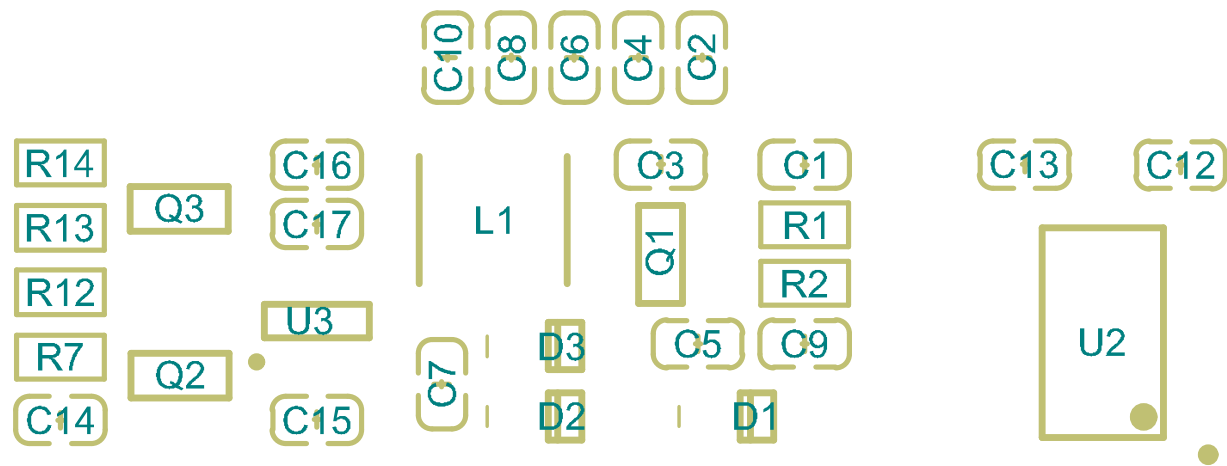

P1